

MAC Corporation

Quality by Design

Rectangular Open Top Roll Off

Our R-model roll off containers are designed for long lasting service in todays markets. Whether the usage is general refuse, construction, demolition, metals recycling, or special purpose MAC can provide the containers to suit your needs.



Available for all popular hoists in 6 to 60 cubic yard capacities


Standard Features

10 GA side, front, and door panels	Side posts on 24" centers
6" x 3" top rails	3/16" steel floor plate
3" 4.1 lb floor channels on 16" avg. centers	6" x 2" x 1/4" wall main rails
Solid steel nose cones inserted into rails	3/4" solid steel hook plate
1-1/2" thick hook inserted through hook plate	Solid steel nose rollers
Push plates on front verticals	Heavy duty bar stock hinges
Rust resistant primer inside and out	2 coats high gloss enamel finish

Roll Off Container Options

MAC Corporation can configure your roll-off container for almost any purpose. If the option you need is not listed, please contact us. We will be happy to accommodate you.

1/4" floor plate	Floor channels on 12" centers
7 GA sides, front, and door sheet	4 ground rollers
A-frame hook-up (all popular styles and sizes)	A-frame plus universal outside rail hook-up
Deadlift hook up	Loop and Bail hook-up
Side hinged, gasketed tailgate	Top hinged, gasketed tailgate
Inverted angles on top rails to prevent debris accumulation	Debris shedding plates between side posts
Side-roll tarp systems	Ratchet binder tailgate lock system
Enclosed top with gasketed spring-assist fill door(s)	Lift-off steel top to prevent pilferage.
Bar grate sub-flooring for liquids separation	Drain valve(s)

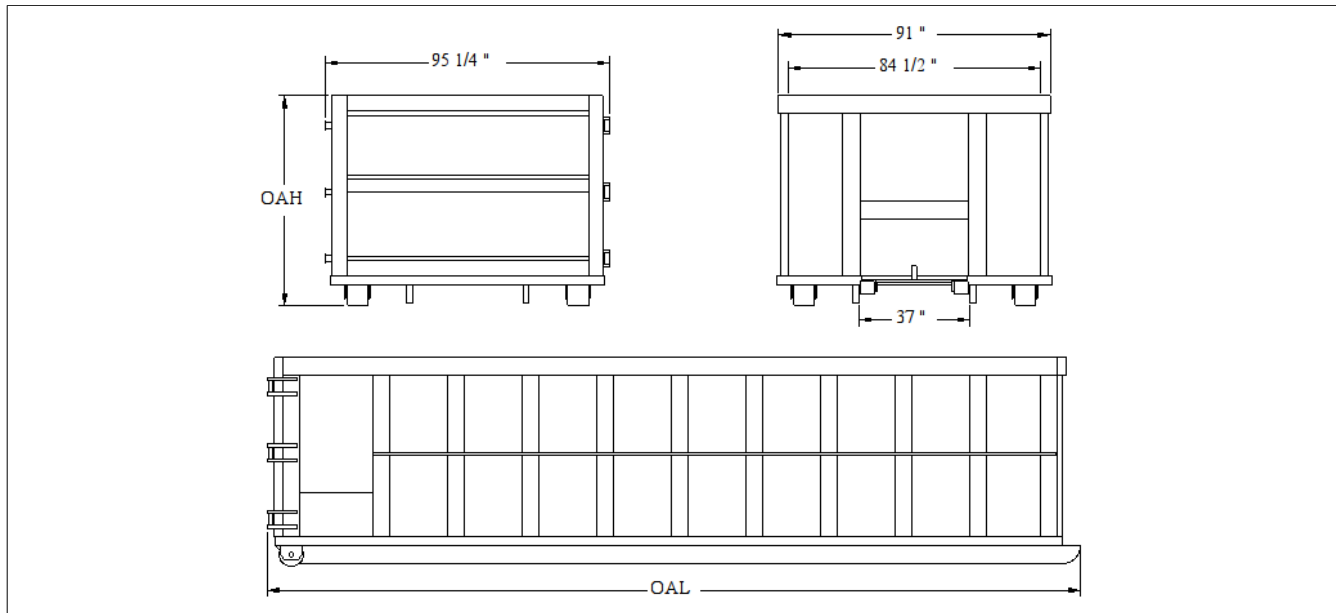

Capacity	Model	OAL	OAH
20YD	R2242	22 ft – 8-1/2 in	4 ft – 4 -1/2 in
30YD	R2260	22 ft – 8-1/2 in	5 ft – 10 -1/2 in
40YD	R2284	22 ft – 8-1/2 in	7 ft – 10 -1/2 in
55YD	R3084	30 ft – 8-1/2 in	7 ft – 10 -1/2 in
70YD	R3689	36 ft – 8-1/2 in	8 ft – 3-1/2 in

Other lengths and sizes available to suit your needs



4717 Massachusetts Avenue
Indianapolis, Indiana

317-545-3341
800-447-5205
Fax: 317-545-8760